


AFT FACE OF FRAME AT POSITION -3500

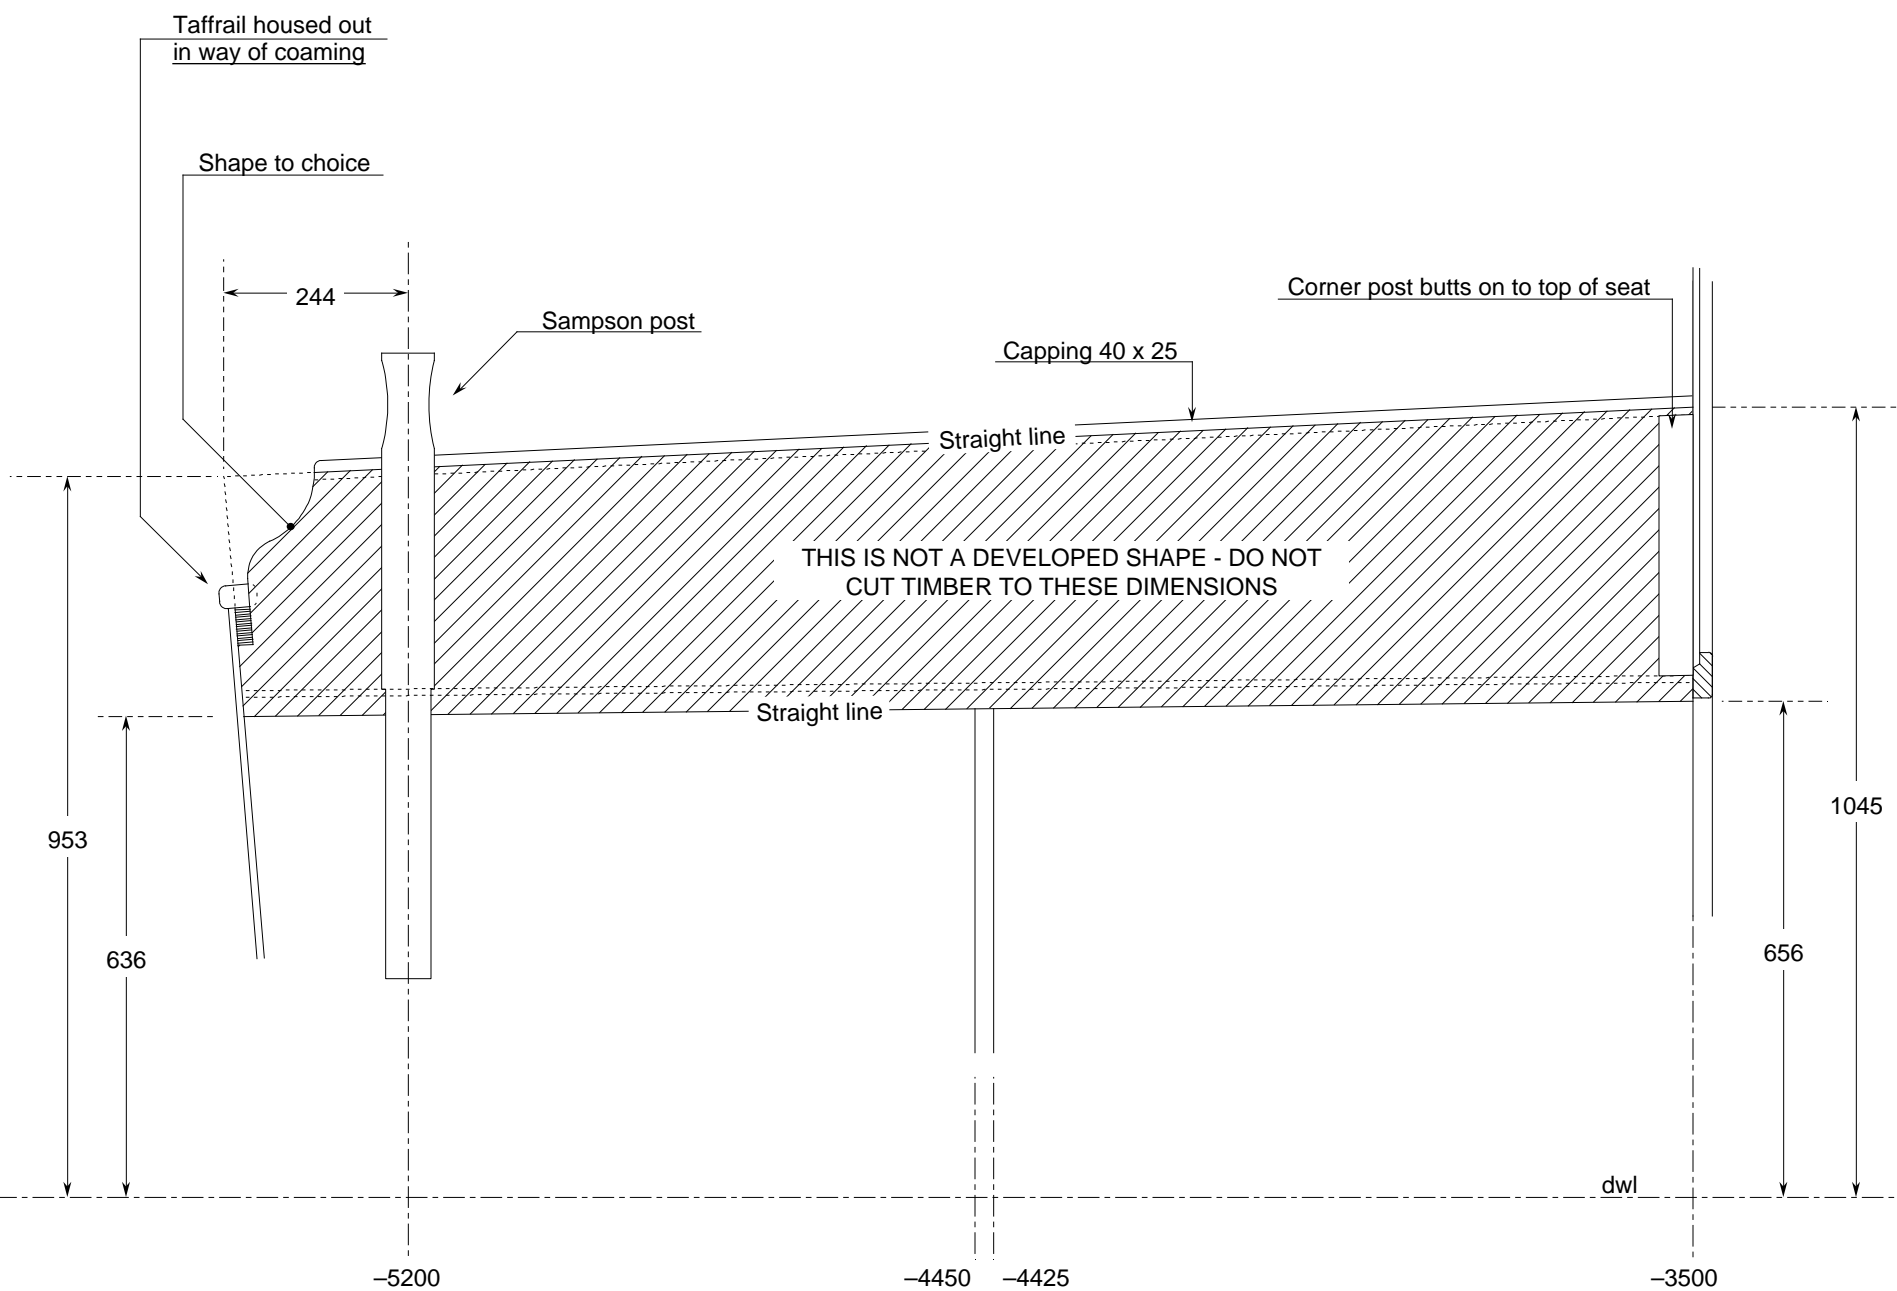

Note: Cockpit seat heights are given to top of 9mm ply seats. Bottom of cockpit coaming is 34mm below these heights (9mm ply + 25mm carling). If cockpit seats are teak covered, bottom of coamings stays at same heights and top of seat heights will increase by thickness of teak.

General Notes:

1. The Zero Point is the intersection of the Datum Water Line (dwl) with the stemface.
2. Positions are measured fwd and aft (marked "-") of the Zero Point.
3. Heights are measured above and below (marked "-") the dwl.
4. Offsets are measured each side of the fore-&-aft centreline.
5. Waterlines are designated "wl" followed by their height.
6. Buttocks are designated "b" followed by their offset.
7. Diagonals are designated "d" followed by their start height on the centreline and their angle to it.
8. Offsets on diagonals are measured down the angle of the diagonal.
9. Offsets are to inside of skin unless noted otherwise.

 Whisstock boats and boat plans	support@whisstock.com	
	Boat 146	Scale 1/10
Cockpit Coaming 2	Date 20/05/2000	Plan No. 146/003/10
	Issue No. 01 web	All dimensions in millimetres unless noted otherwise
© bmarkweb Ltd 2002 All Rights Reserved		