

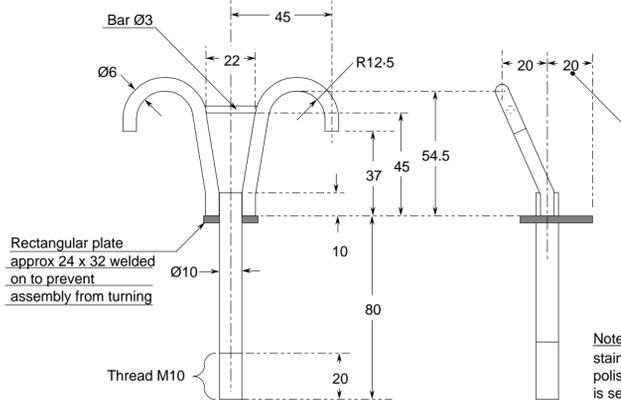
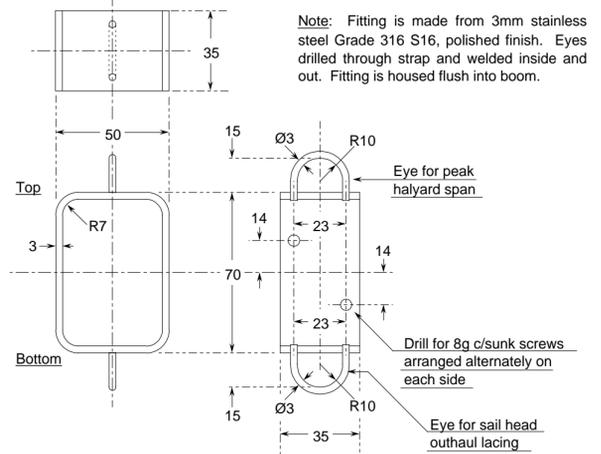


Note: Gooseneck material stainless steel Grade 316 S16, polished finish. Gooseneck made from 5mm material (side straps 3mm and bushes as shown). Delrin for bearing bushes and washers.


MAIN BOOM GOOSENECK

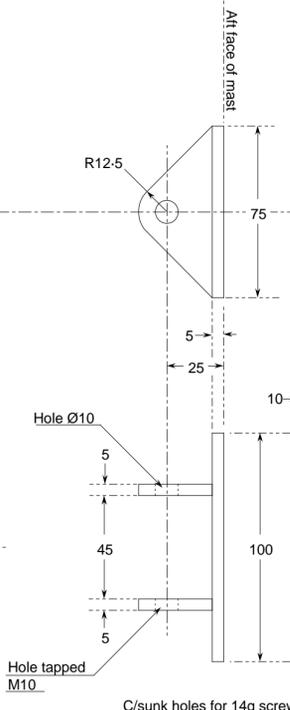


Note: Fitting fabricated from stainless steel Grade 316 S16, polished after fabrication. Fitting is secured by M10 nut & lock-nut.

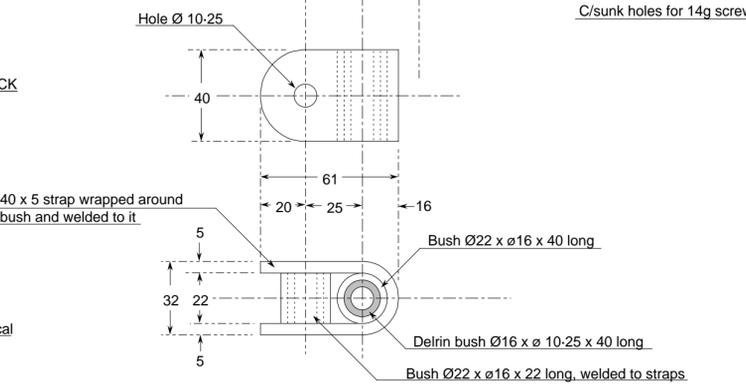

MAIN YARD TOP END FITTING

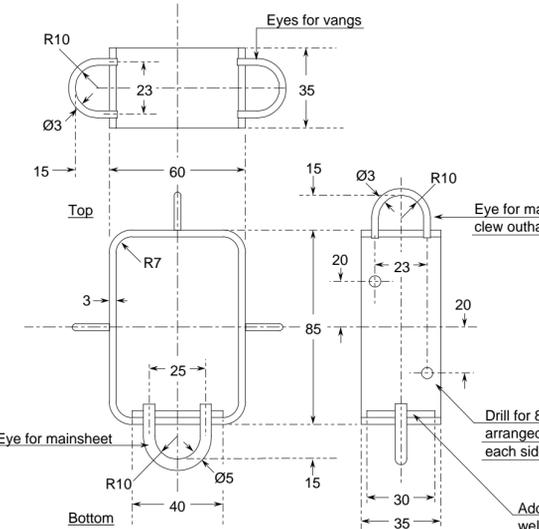

MAIN BOOM OUTER END FITTING

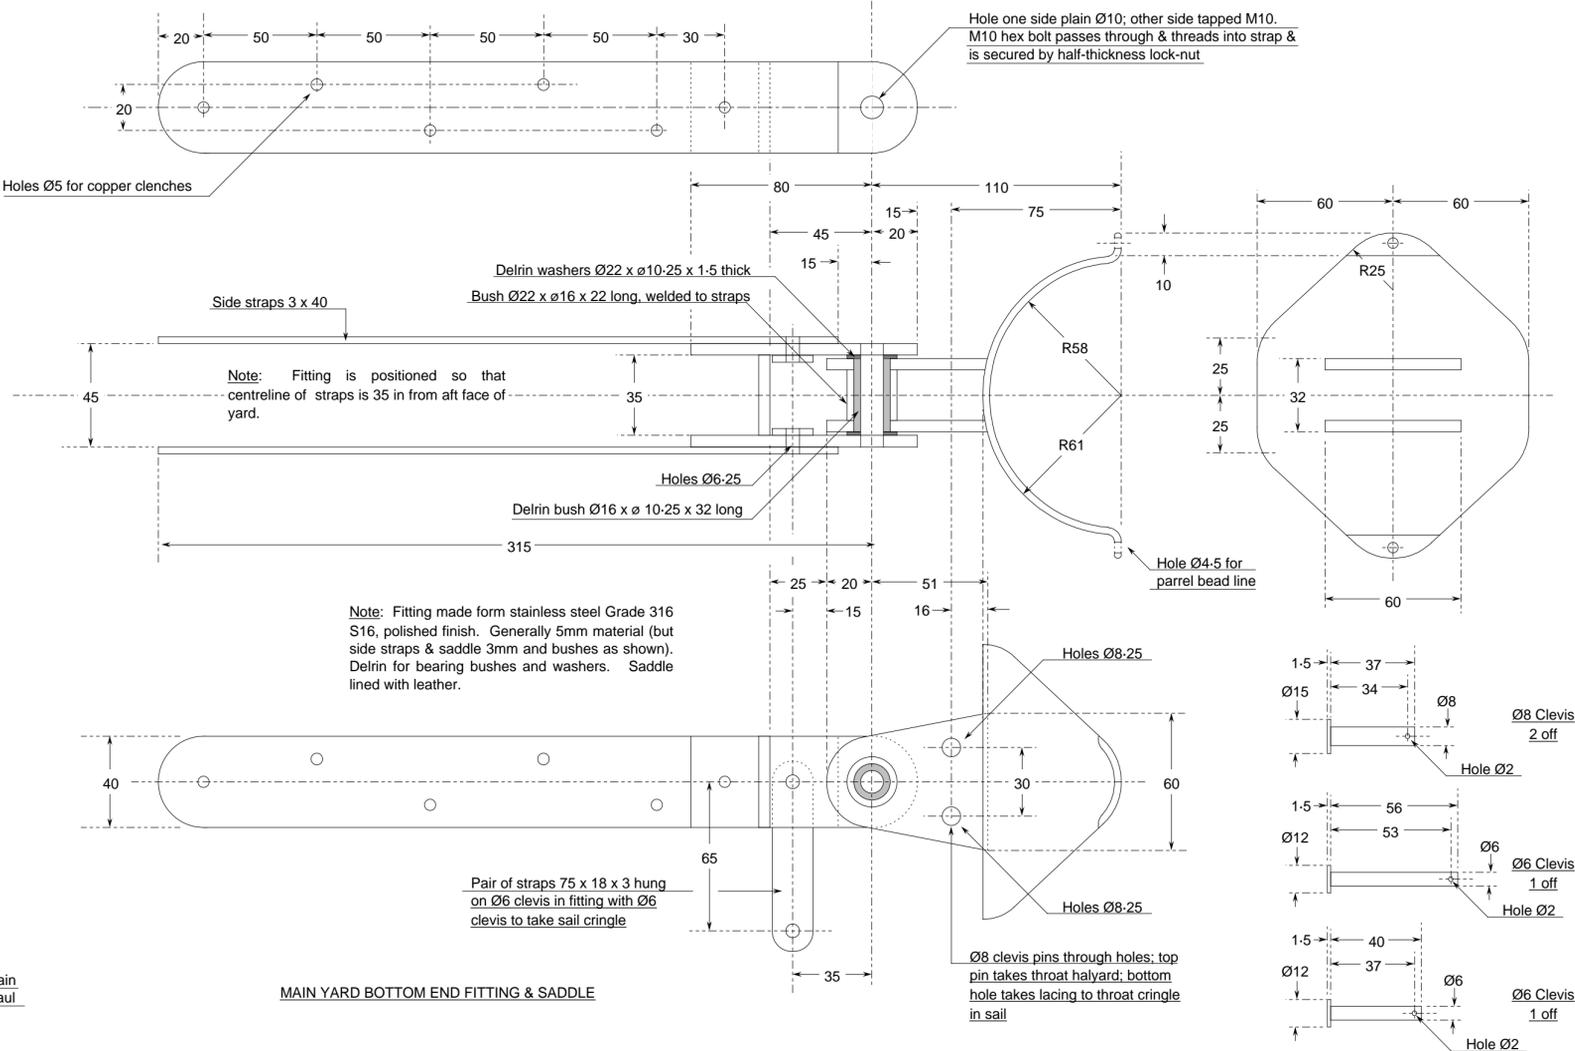

MAIN YARD BOTTOM END FITTING & SADDLE

Notes:

1. All dimensions are in millimetres unless otherwise noted.
2. Ø indicates outside diameter; ø indicates inside diameter
3. If possible check with sailmaker before making up gooseneck pin to ensure that reef hooks & attachment for tack lashing will suit position of sail cringles etc.
4. Yard sets at 5° to mainmast. Check length of throat cringle straps with sailmaker before making up.

Whisstock boats and boat plans support@whisstock.com

Boat 012
Main Boom & Yard Fittings

Scale 1/2
Date 14/01/2009
Plan No. 012/011/05
Issue No. 01 web
Drawing Size 895 x 305 - 35" x 12"

© Bmarkweb Ltd 2009 All Rights Reserved