


Note: Check stem dimensions on boat before making fitting.

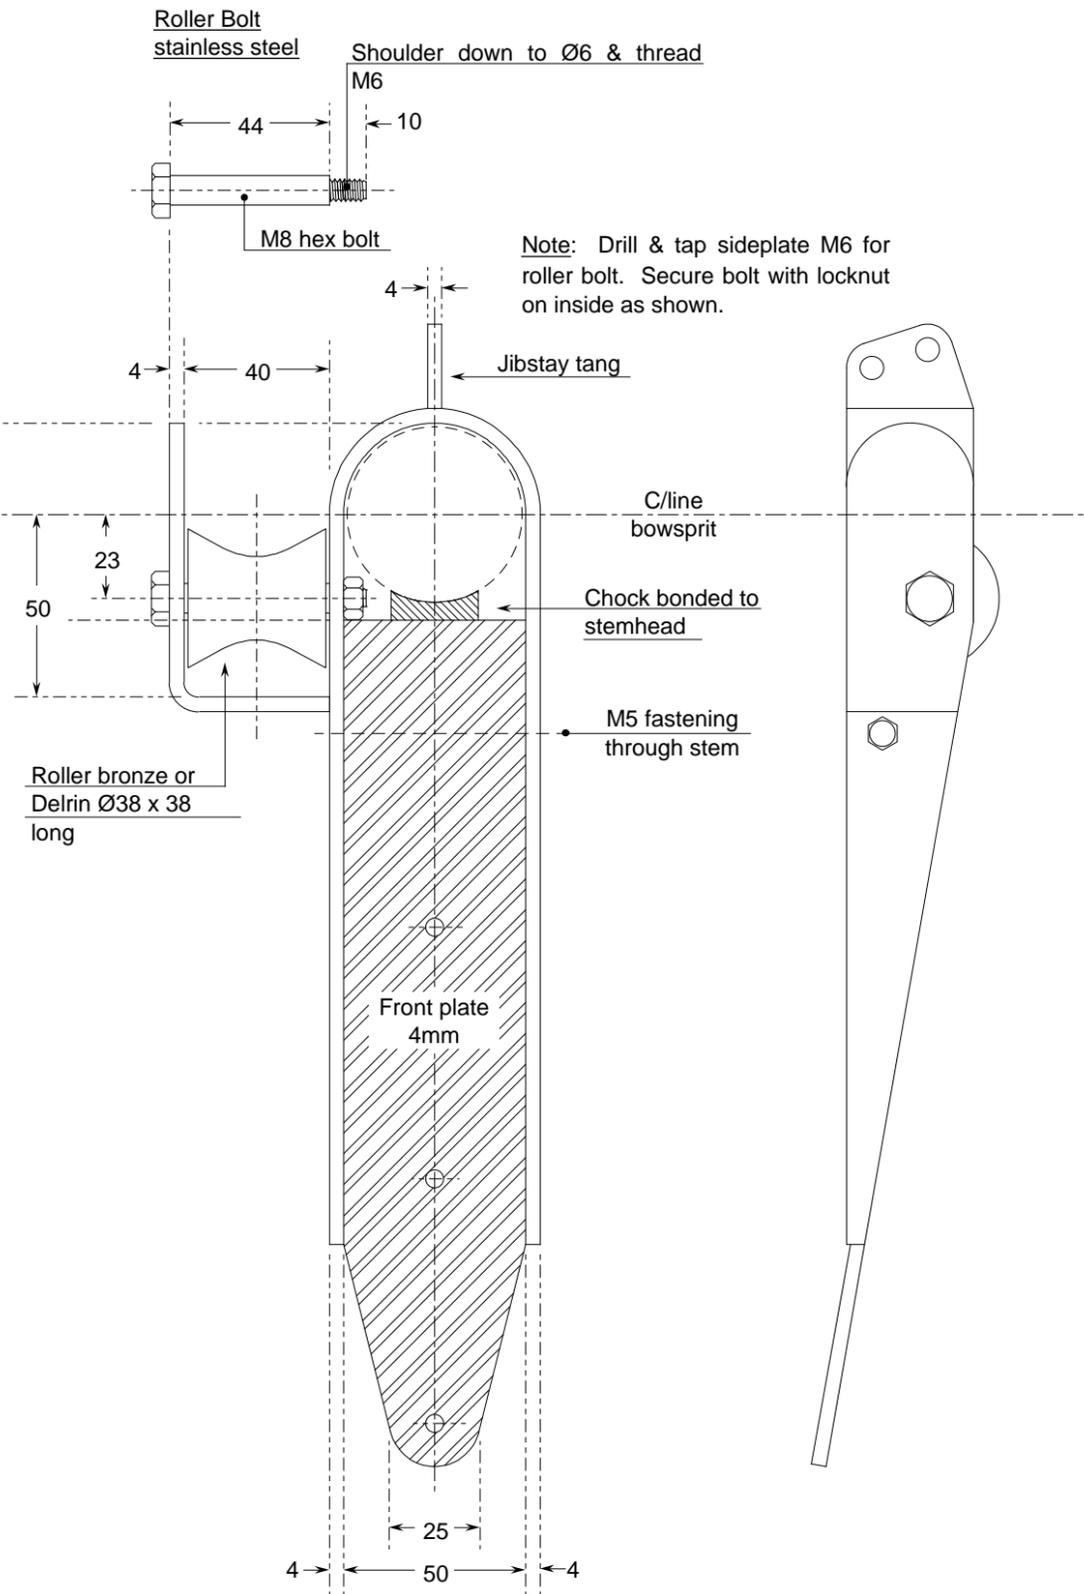

Note: Drill & tap sideplate M6 for roller bolt. Secure bolt with locknut on inside as shown.

Note: Stemhead fitting is fabricated from phosphor bronze CuSn5 (PB102), TiG welded and polished after fabrication. Or alternatively stainless steel grade 316.

 Whisstock boats and boat plans		support@whisstock.com	
Boat 055 Stemhead Fitting		Scale	1/2
		Date	20/05/2000
		Plan No.	055/011/02
		Issue No.	01 web
		All dimensions in millimetres unless noted otherwise	
© bmarkweb Ltd 2002 All Rights Reserved			